


# STANDARD DOORS 78

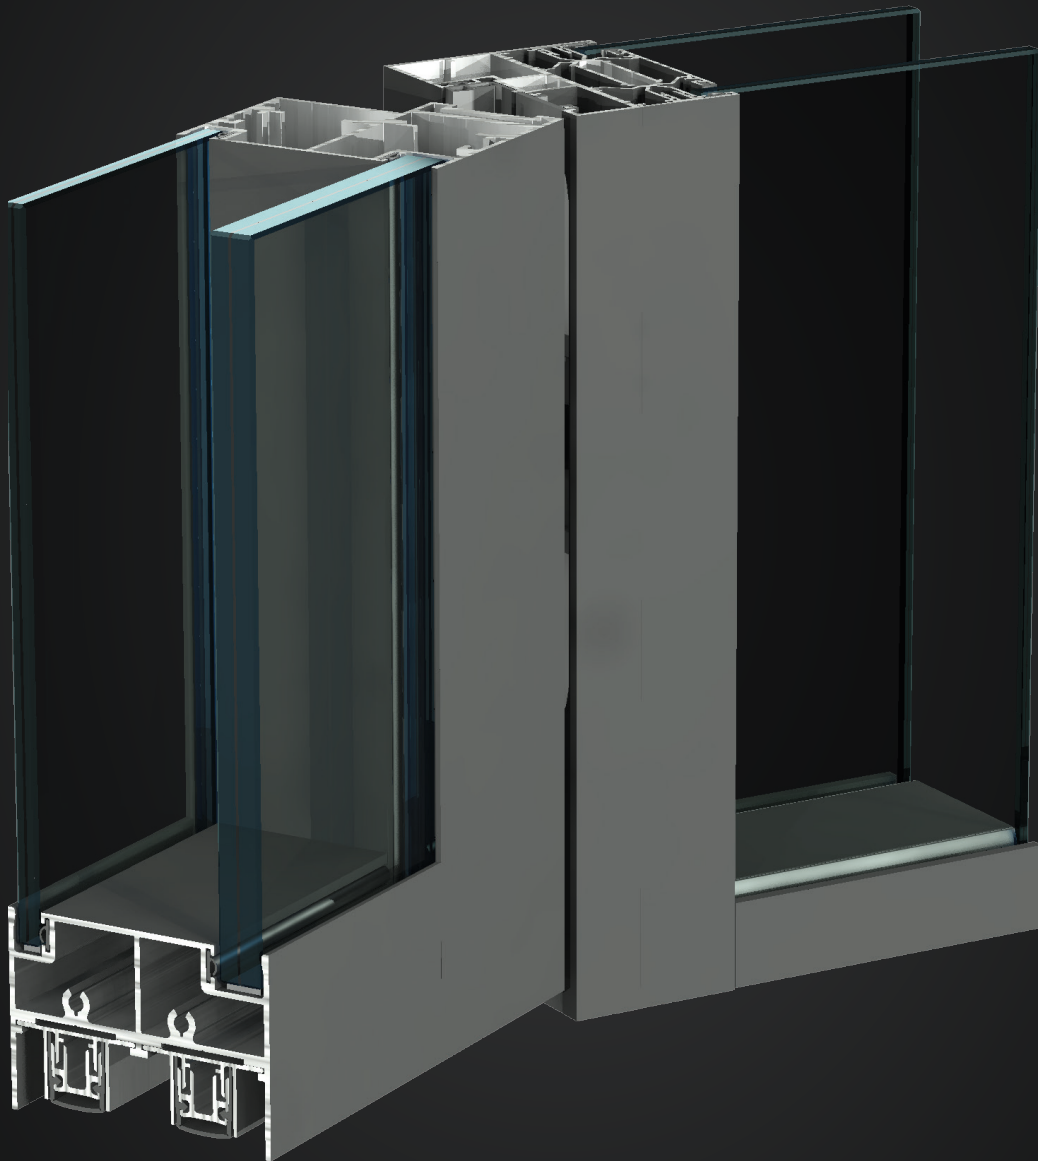

# STANDARD DOORS 78

Double-glazed STANDARD 78 doors with aluminium frame with two retractable bottom seals. There is an option to install a door closer and access control system. Aluminium frame 78 mm, 100 mm thick. STANDARD 78 doors are facing both sides of the SILENCE system. The door can be installed in any assembly opening, also in a glass wall system.

Glazing (single leaf)	Acoustic insulation Rw
VSG 33.1 + 55.1 (two retractable bottom seals)	40 dB
VSG 33.2 + 66.2Si (two retractable bottom seals)	42 dB

Glazing (double leaf)	Acoustic insulation Rw
VSG 33.2 + 66.2Si (two retractable bottom seals)	42 dB

Single or double leaf doors

Maximum leaf height 3,000 mm

Glass thickness 6 ÷ 12 mm

Door frame profiles painted in any RAL colour

Fittings in stainless steel finish as standard, can be painted in any RAL colour

Transparent/frosted/tinted/smoked/LCD glass

Optional fittings: access control (electric strike, magnetic strike), external door closer

Concealed hinge

Option of installing blinds

Option of installing sidelights and fanlights above the door frame